

DONEYLOOP
CASTLEFIN
CO. DONEGAL

TEL: 9146379
CODE: (074)



4 ORCHARD ROAD
STRABANE
CO TYRONE
BT82 9QR

TEL: 71382936
CODE: (028)

INDUSTRIAL ROLLER SHUTTER DOORS



OPTIONS:

* GALVANISED STEEL

* PVC COLOUR COAT HP200

OR;

* POLYESTER POWDER COATING
(OPTION OF COLOURS)

* CHAIN OPERATION


* ELECTRIC OPERATION BY SINGLE
PHASE OR 3 PHASE MOTOR

* REMOTE CONTROL

* BRUSH SEALS

* COIL CASING

STEEL ROLLER SHUTTER FOR INDUSTRIAL APPLICATIONS

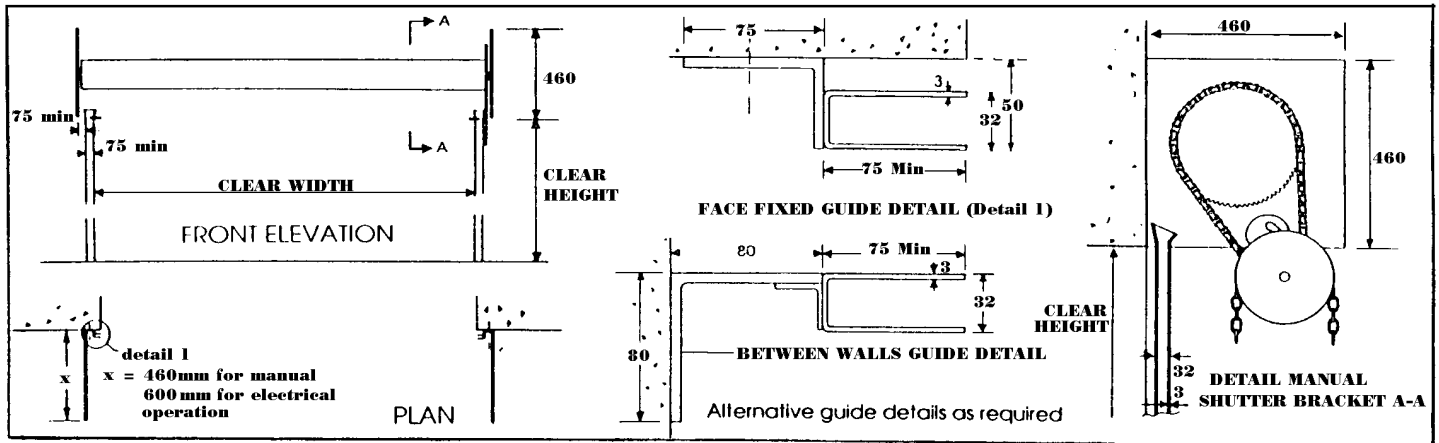

SPECIFICATION

Roller

125mm medium steel barrel to BS 1387, minimum wall thickness 10 gauge with 10mm helical springs to fully counter balance curtain weight and provide easy shutter operation.

Side Guides

Cold rolled 10 gauge galvanized section 50, 75, 100mm or more depending on shutter width, welded to steel angle, other dimensions to suit fixings.

Curtain

75 mm 20 gauge galvanized steel curtain fitted with cast iron malleable galvanized endlocks bolted in position.

Brackets

8mm steel mounting plate bolted to mild steel angle to suit fixings. Complete with cast "u" brackets and chain drive from hand chain wheel to roller, complete with chain tension adjustment.


Bottom Iron

16 gauge cold rolled galvanized steel formed into a double T rail with an 80mm base.

Electric Operation

(option)

1/2 kw 3 phase motor gear box unit controlled by DOL rev, starter with thermal overload and gear driven limit switch unit. With integral declutching for manual (hand chain) operation in the event of power failure.



NOTE: All above gauges are minimum and are increased as required on larger shutters. In keeping with our policy of continued improvement the manufacturer reserves the right to alter specifications without prior notice.

Handchain Operated Door

